

OKTA — Group-Based SCIM Provisioning

How to Set Up Group Sync from OKTA to Your Application

To sync group members from OKTA to an application using SCIM, you need to complete **two things** inside the application:



Action	What it does
1. Assign the group	Gives the group access to the application
2. Push the group	Sends the group and its members to SCIM

Note: Both steps are required. If only one is done, members will not appear in the SCIM response.

Step 1

Create a group in Okta to control which users are provisioned to your application.

1. Navigate to **Directory** from the left navigation panel.
2. Click **Groups**, then click “**+ Add Group.**”
3. Enter a **Group Name** (e.g., Engineering-Team) and a **Description** (e.g., SCIM provisioning group).
4. Click **Save**.

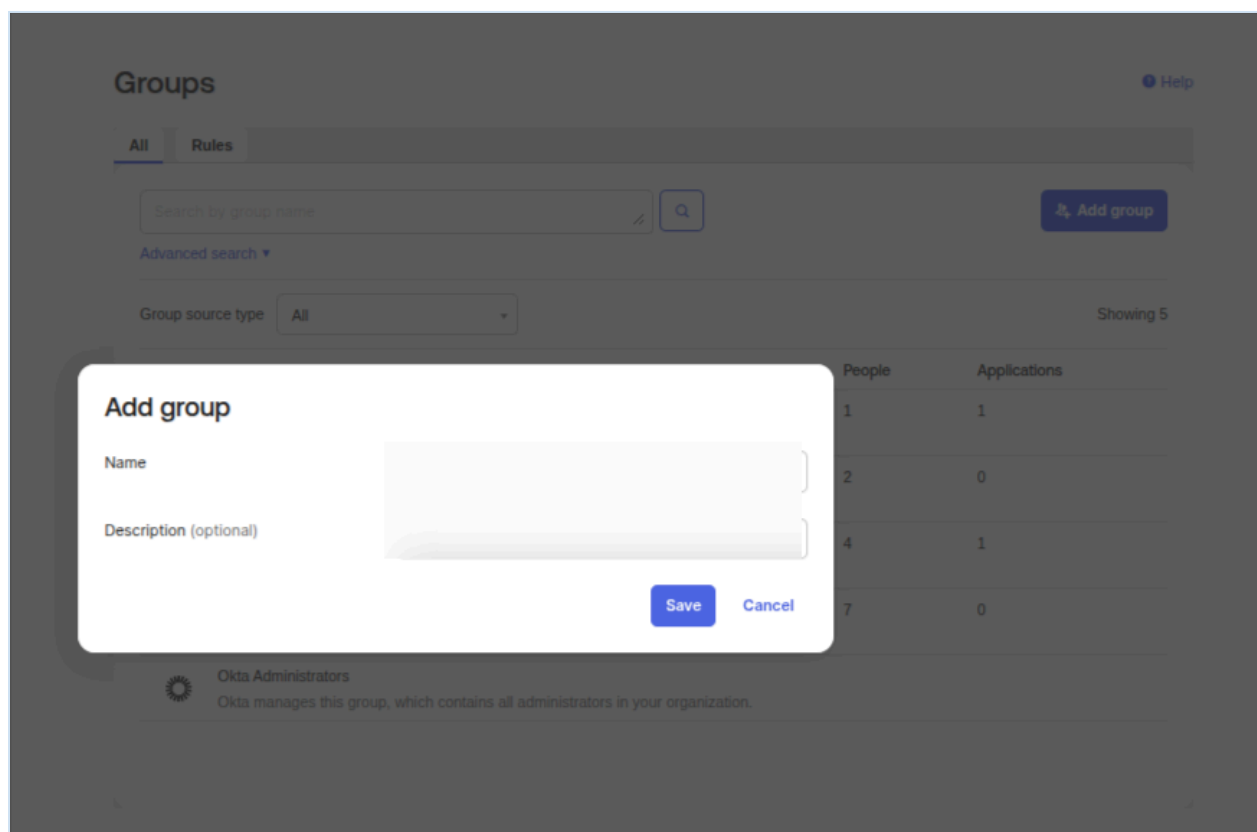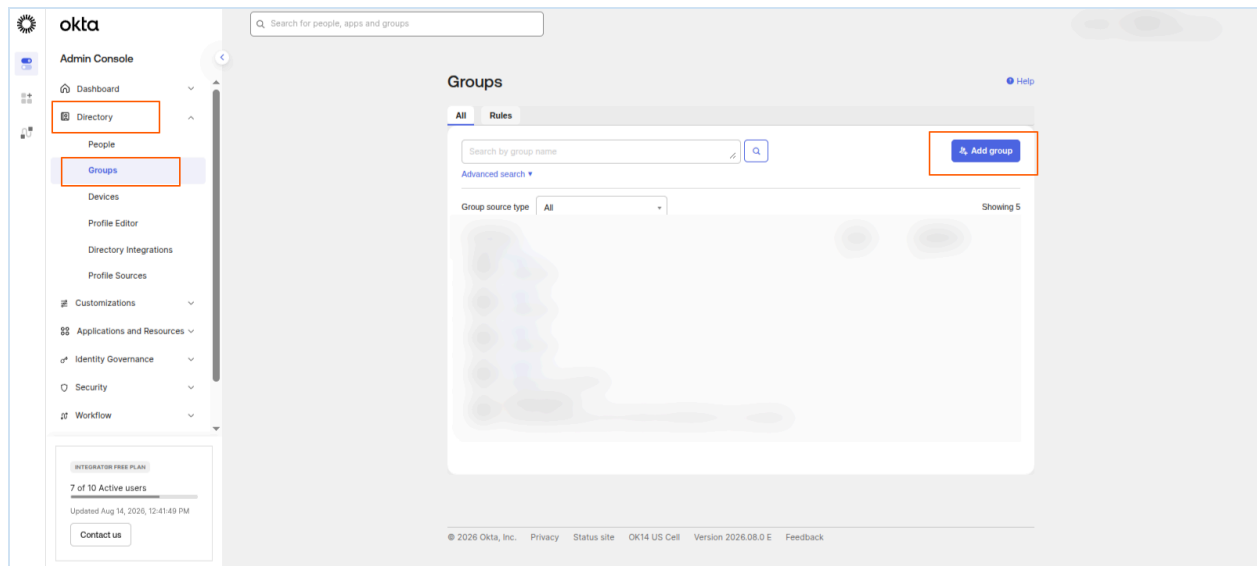


Step 2

Add members to the group so they can be synced to your application.

1. Click on the **group** you just created.
2. Click the **Manage** People button.
3. Search for each user and click **+** to add them.

4. Click **Save** when done.

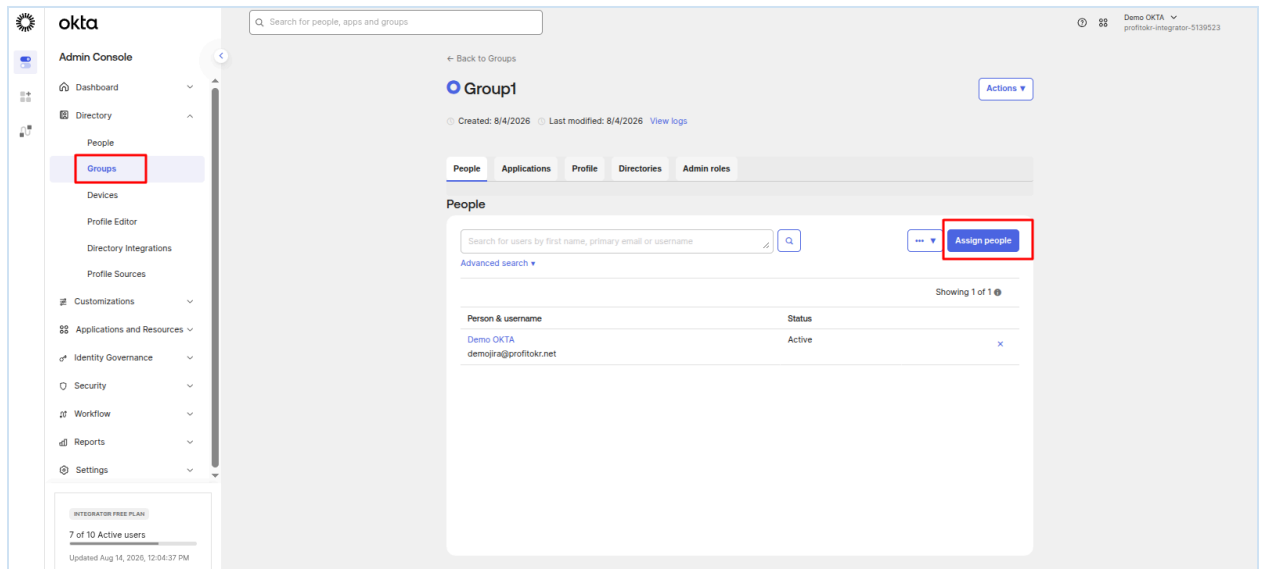


Step 3

Assign the group to your application to grant it access.

1. Navigate to **Applications > Applications** and open your app.
2. Click the **Assignments** tab.
3. Click **Assign**, then select “**Assign to Groups.**”
4. Search for your group and click Assign.
5. Click “**Save and Go Back,**” then click **Done.**


Note: Assigning the group grants it access to the application, but members are not yet pushed to SCIM. Complete Step 4 to finish provisioning.

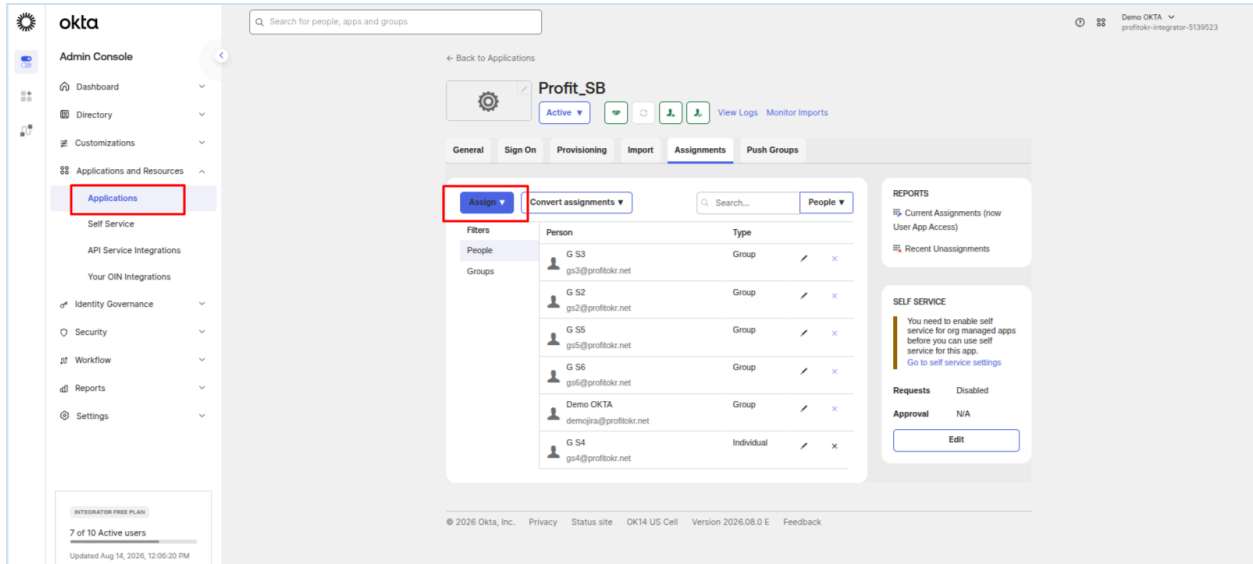

Step 4

Push the group so its members sync to SCIM.

1. Click the Push Groups tab.
2. Click "Push Groups," then select "Find groups by name."
3. Type the group name and select it.
4. Click Save.

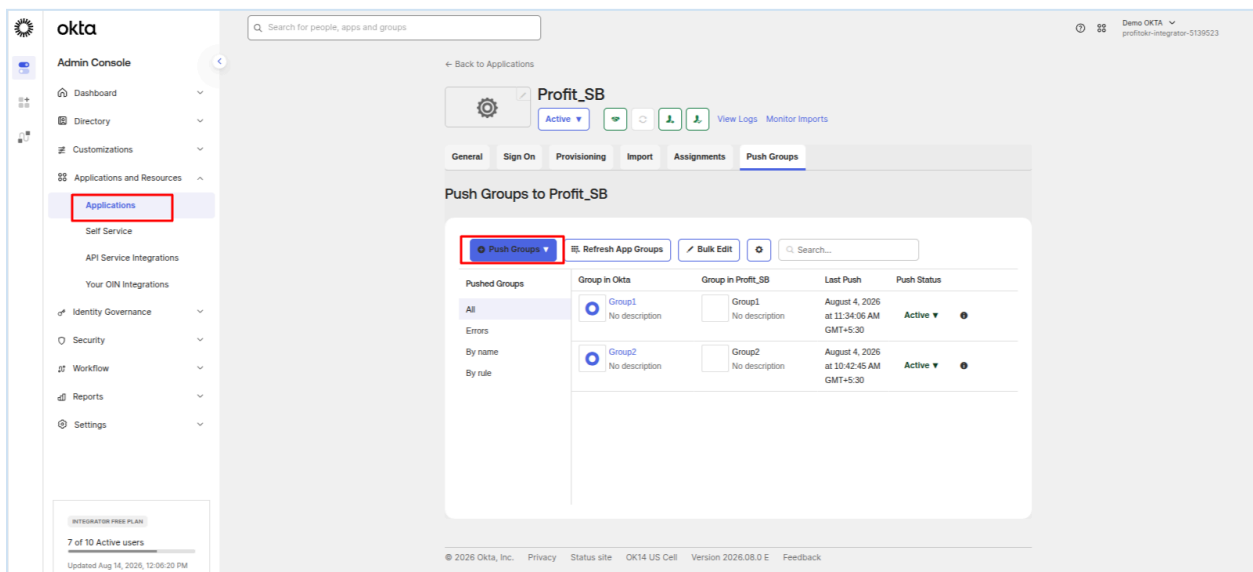

Note: Once *Push Status* shows *Active*, members are syncing to SCIM. Any new members added to the group afterward sync automatically — no need to push again.